


KIMERA



TECHNICAL DATA


Power supply	24 V
Source	SW55
Brightness	700 lm/m
Light colour	4000 K
CRI	>90
Insulation class	III
IP grade	IP20
Photobiological safety	Exempt risk group
Output cable	700 mm

Power supply unit not supplied in packaging. Recessed cut-out L=Lx20mm R.2.5


LIGHT DIFFUSION

cm	lux
30	945
50	510
100	220

MOUNTING

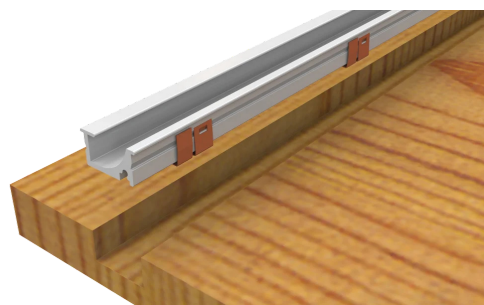

DIMENSIONS

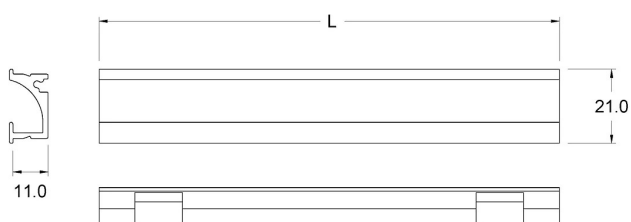

KIMERA

Without switch

PRODUCT CODES

CODE

xxxxxxxKIMERA

DESCRIPTION

Personalizzabile su richiesta



POSSIBILITÀ DI PERSONALIZZAZIONE PRODOTTO

Lunghezza profilo a misura

Finitura del profilo

Temperatura colore sorgente luminosa

