
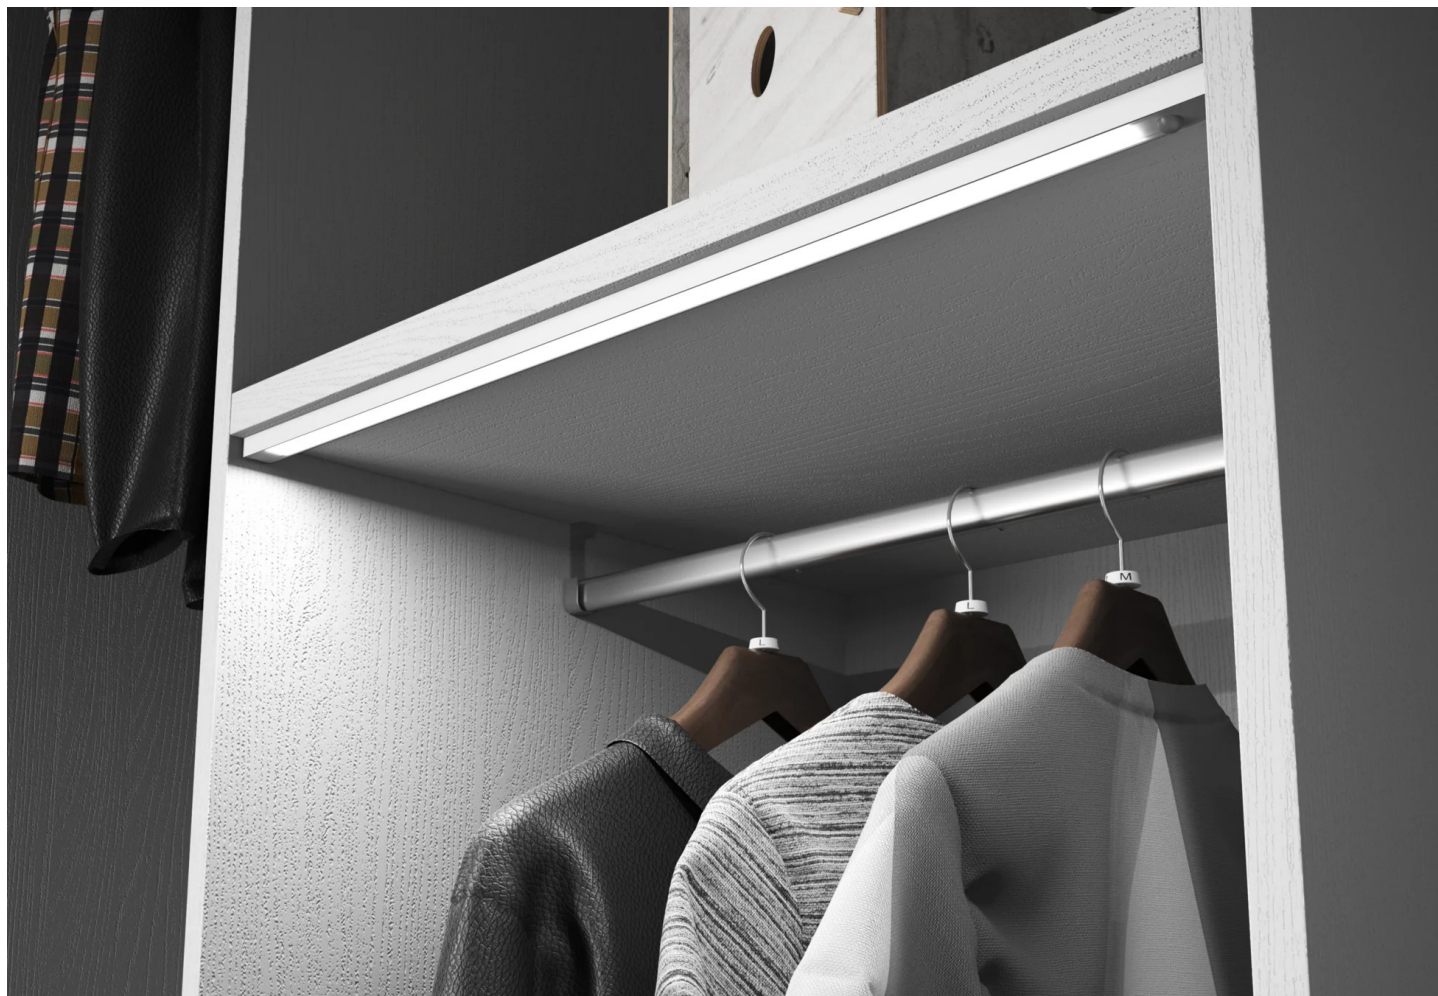


MIAMI




TECHNICAL DATA


Power supply	12 V
Source	SL300
Light colour	4000 K
CRI	>90
Insulation class	III
IP grade	IP20
Switch	Sensore di movimento
Photobiological safety	Exempt risk group
Output cable	1800 mm

Power supply unit not supplied in packaging


LIGHT DIFFUSION

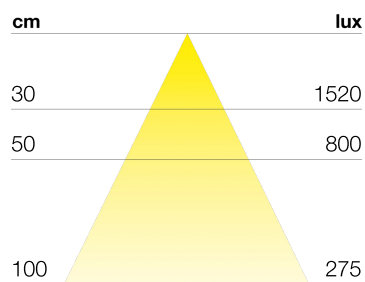

MOUNTING

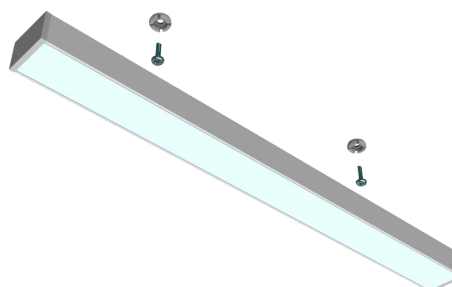

DIMENSIONS

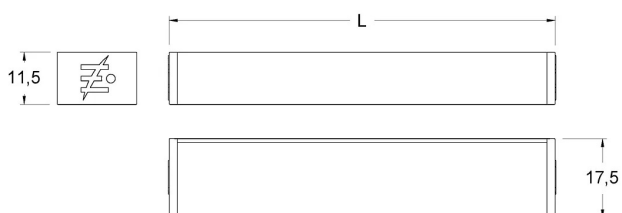


MIAMI

Integrated presence sensor



PRODUCT CODES

CODE	LENGTH	POWER	BRIGHTNESS	FINISH
95700964	560 mm	4.5 W	384 lm	aluminium
95700966	860 mm	7.5 W	632 lm	aluminium
95700968	1160 mm	10.5 W	872 lm	aluminium
9570096802	560 mm	4.5 W	384 lm	black
9570096804	860 mm	7.5 W	632 lm	black
9570096806	1160 mm	10.5 W	872 lm	black

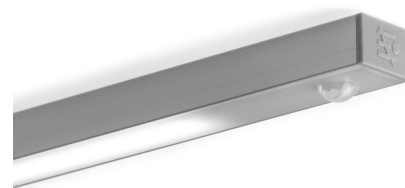

MIAMI

Without switch

PRODUCT CODES

CODE	DESCRIPTION
xxxxxxxMIAMI	Personalizzabile su richiesta



POSSIBILITÀ DI PERSONALIZZAZIONE PRODOTTO

Lunghezza profilo a misura

Finitura del profilo

Temperatura colore sorgente luminosa

