


MIRAGE




TECHNICAL DATA


Power supply	12 V
Source	SL120
Light colour	6000 K
CRI	>90
Insulation class	III
IP grade	IP20
Switch	Sensore di movimento
Finish	alluminio
Photobiological safety	Exempt risk group
Output cable	1800 mm

Power supply 230V-50/60Hz included in packaging. Recessed drilling L=L-2x20mm R.2,5mm


DIMENSIONS



LIGHT DIFFUSION

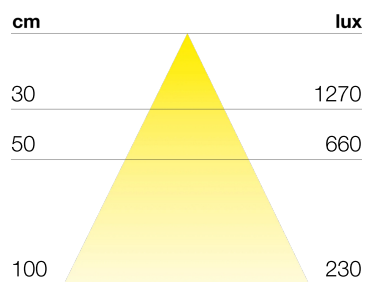

MOUNTING

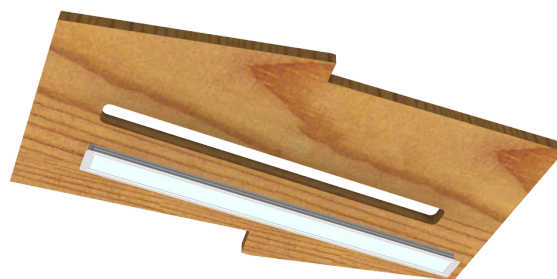

MIRAGE

Integrated presence sensor



PRODUCT CODES

CODE	LENGTH	POWER	BRIGHTNESS
95500188	560 mm	2.5 W	378 lm
95500190	860 mm	3.8 W	630 lm
95500192	1160 mm	5.3 W	882 lm



MIRAGE

Without switch

PRODUCT CODES

CODE	DESCRIPTION
xxxxxxxMIRAGE	Personalizzabile su richiesta



POSSIBILITÀ DI PERSONALIZZAZIONE PRODOTTO

Lunghezza profilo a misura

Finitura del profilo

Temperatura colore sorgente luminosa

