

S410




TECHNICAL DATA


Power	8 W/m
Source	S410
CRI	>80
Insulation class	III
IP grade	IP44
Photobiological safety	Exempt risk group

Power supply unit not supplied in packaging. Recessed cut-out L=Lx4.5mm


LIGHT DIFFUSION

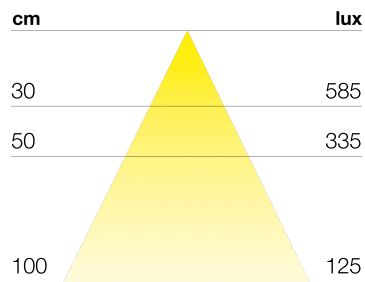

DIMENSIONS

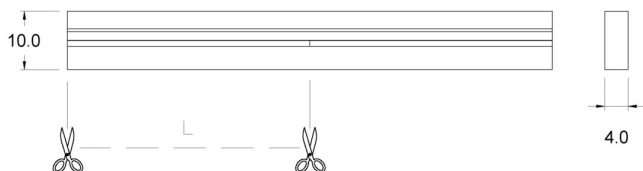

MOUNTING


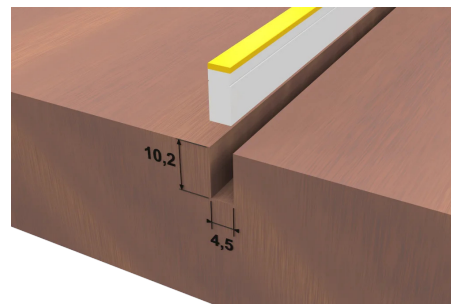


S410

Without switch

PRODUCT CODES

CODE	TENSION	LIGHT COLOUR	BRIGHTNESS	CUTTING UNIT
9022058240	12 V	3000 K	200 lm/m	18 mm
9022058242	12 V	4000 K	230 lm/m	18 mm
9022058214	24 V	3000 K	200 lm/m	41 mm
9022058212	24 V	4000 K	230 lm/m	41 mm

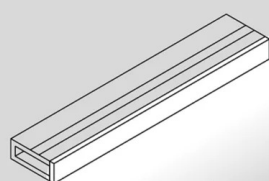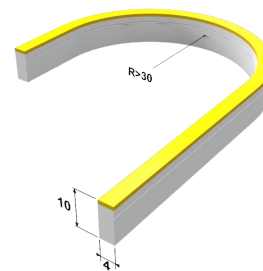

Temperatura colore sorgente luminosa